


# Transformer Cart

Lind Equipment's portable Transformer Cart is innovatively designed to allow for **quick and convenient access to electrical components**, while still maintaining a high level of **safety and portability**. The compact design allows this cart to fit through standard sized doors, making it easy to move from one space to another as needed.

Built to withstand the toughest environments, and constructed with a powder coated steel frame, Lind's portable Transformer Cart will last for many projects to come.

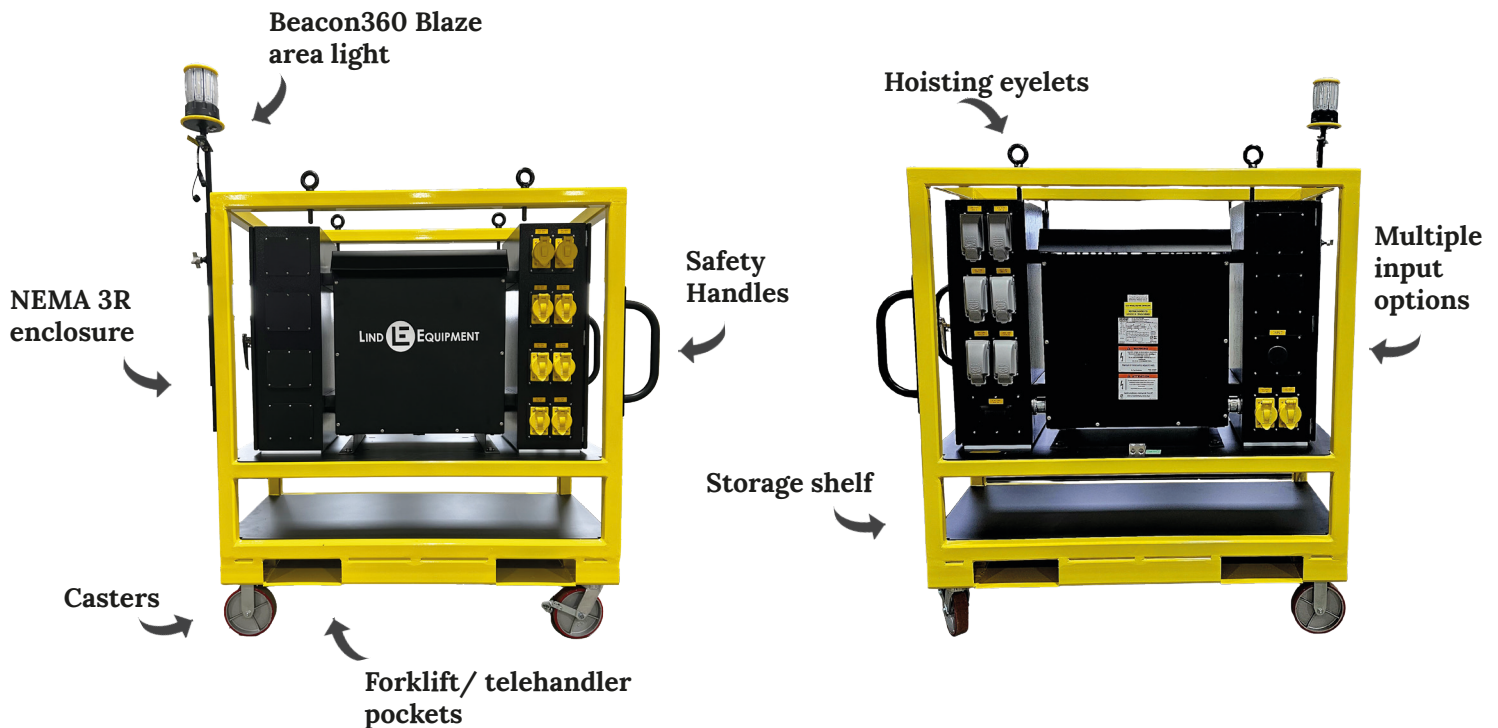

## Features

- Accommodates 30-75KVA transformers.
- Forklift/telehandler pockets.
- Hoisting eyelets.
- Heavy-duty swivel casters.
- Covered storage shelf.
- Weatherproof electrical enclosures.
- Dedicated Quad USB receptacle for charging mobile devices.
- Built-in Beacon360 Blaze area light.
- Safety handles.
- Fits through a standard doorway.

## Benefits

- Multiple input options:
  - Hard wire, camlock, pin & sleeve, etc.
- Easy to repair & modify in the future.
- Compatible with multiple breaker brands.
- Fits through standard sized man doors.
- Seamless compatibility with other Lind products.
- Easy to maintain and source components.
- Custom powder coat colours (optional).
- Plasma etched company logo in frame (optional).

An innovative take on traditional portable power and the smartest way to power your jobsite.

# Transformer Cart

## Specifications

Part Numbers	CDN - 600V LE-45TC600208-60	CDN - 600V LE-45TC600208-100		CDN - 600V LE-75TC600208-100	CDN - 600V LE-75TC600208-200	
	USA - 480V LE-45TC480208-60	USA - 480V LE-45TC480208-100		USA - 480V LE-75TC480208-100	USA - 480V LE-75TC480208-200	
Input Amperage	60A	100A		100A	200A	
Input Options	Hardwire Only	Hardwire (Default) 5W Camlock (Add CL5 to the part #)		Hardwire Only	Hardwire (Default) 5W Camlock (Add CL5 to the part #)	
Primary Voltage (600V or 480V)	60A Disconnect Switch (Non-Fused)	CDN - 600/347V	USA - 480/277V	100A Disconnect Switch (Non-Fused)	CDN - 600/347V	USA - 480/277V
		100A Main Breaker 1x 50A 600V (HBL3769) 60A to XFMR	100A Main Breaker 4x 20A 277V (Breakers Only) 60A to XFMR		200A Main Breaker 2x 50A 600V (HBL3769) 100A to XFMR	200A Main Breaker 2x 50A 480V (CS8169) 4x 20A 277V (Breakers Only) 100A to XFMR
Transformer	45KVA Delta to Wye			75KVA Delta to Wye		
Secondary Voltage (120/208V)	150A Main Breaker			225A Main Breaker		
	4x 50A 125/250V Twist Lock (California Std) 6x 20A 125V T-Slot GFCI Duplex (5-20R) 2x 30A 250V Twist Lock (L6-30R) 1x 4.8A 125V Quad USB			6x 50A 125/250V Twist Lock (California Std) 6x 20A 125V T-Slot GFCI Duplex (5-20R) 2x 30A 250V Twist Lock (L6-30R) 1x 4.8A 125V Quad USB		
Dimensions	60.5" L x 31.75" W x 67.5" H					
Enclosure Rating	NEMA 3R					
Construction	Heavy Gauge Powder Coated Steel					
Approvals	UL & CSA Standards					

If our standard configurations aren't exactly what you're looking for, Lind's Transformer Cart can be customized to meet your project's unique specifications. Contact your local representative to discuss your project requirements in further detail.

### Installation Guidelines

- We estimate each Lind power unit has a 100ft x 100ft (10,000ft<sup>2</sup>) area of coverage, assuming the use of 50' extension cords to power tools and equipment.
- Each 50A 125/250V California Standard receptacle is used to power one 50A Spider Box.