


# Power Dolly

Lind Equipment's portable Power Dolly is innovatively designed to allow for **quick and convenient access to electrical components**, while still maintaining a high level of **safety and portability**. The compact design makes it easy to move from one space to another as needed.

Built to withstand the toughest environments, and constructed with a powder coated steel frame, Lind's portable Power Dolly will last for many projects to come.

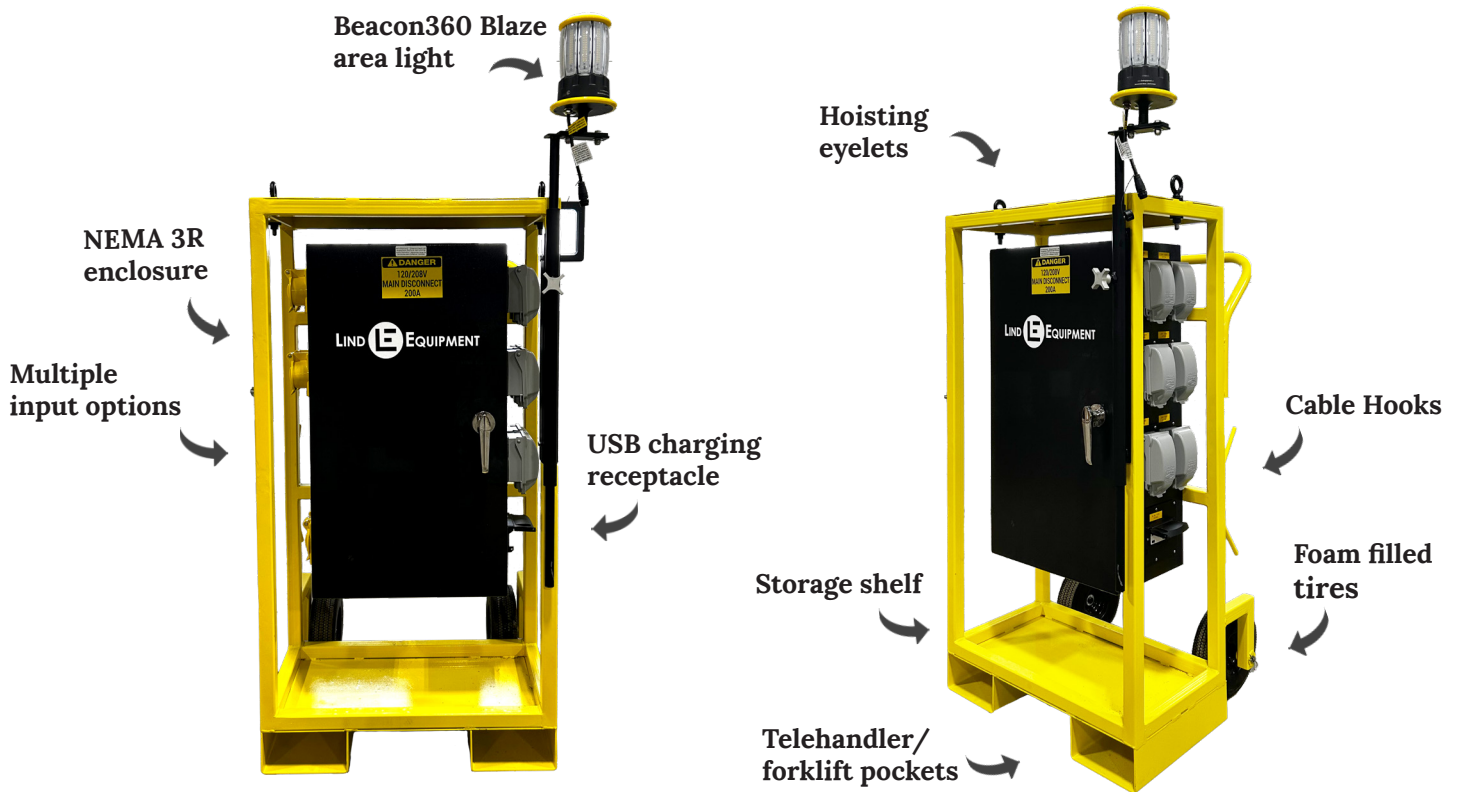

## Features

- Configuration options from 100A-400A.
- Hoisting eyelets.
- Foam filled tires.
- Storage shelf.
- Cable hooks.
- Weatherproof electrical enclosure.
- Dedicated Quad USB receptacle for charging mobile devices.
- Built-in Beacon360 Blaze area light.
- Forklift/telehandler pockets.
- Fits through a standard doorway.

## Benefits

- Multiple input options:  
- Hard wire, camlock, pin & sleeve, etc.
- Easy to repair & modify in the future.
- Compatible with multiple breaker brands.
- Fits through standard sized man doors.
- Seamless compatibility with other Lind products.
- Easy to maintain and source components.
- Custom powder coat colours (optional).
- Plasma etched company logo in frame (optional).

An innovative take on traditional portable power and the smartest way to power your jobsite.

# Power Dolly

## Specifications

Part Numbers	LE-PD120-100	LE-PD120-200	LE-PD120-400
Input Amperage	100A	200A	400A
Input Options	Hardwire (Default) 5W Camlock (Add CL5 to the part #)	Hardwire (Default) 5W Camlock (Add CL5 to the part #)	Hardwire (Default) 5W Camlock (Add CL5 to the part #)
Output (120/240V) or (120/208V)  *480V & 600V available at request*	100A Main Breaker 2x 50A 125/250V Twist Lock (Cali Std) 6x 20A 125V T-Slot GFCI Duplex (5-20R) 2x 30A 250V Twist Lock (L6-30R) 1x 4.8A 125V Quad USB	200A Main Breaker 4x 50A 125/250V Twist Lock (Cali Std) 6x 20A 125V T-Slot GFCI Duplex (5-20R) 2x 30A 250V Twist Lock (L6-30R) 1x 4.8A 125V Quad USB	400A Main Breaker 8x 50A 125/250V Twist Lock (Cali Std) 6x 20A 125V T-Slot GFCI Duplex (5-20R) 2x 30A 250V Twist Lock (L6-30R) 1x 4.8A 125V Quad USB
Dimensions	24" L x 29" W x 56" H		
Enclosure Rating	NEMA 3R		
Construction	Heavy Gauge Powder Coated Steel		
Approvals	UL & CSA Standards		

If our standard configurations aren't exactly what you're looking for, Lind's Power Dolly can be customized to meet your project's unique specifications. Contact your local representative to discuss your project requirements in further detail.

### Installation Guidelines

- We estimate each Lind power unit has a 100ft x 100ft (10,000ft<sup>2</sup>) area of coverage, assuming the use of 50' extension cords to power tools and equipment.
- Each 50A 125/250V California Standard receptacle is used to power one 50A Spider Box.