
JOBSITE 360'



RESIDENTIAL JOBSITE360

POWER DISTRIBUTION & TEMPORARY LIGHTING



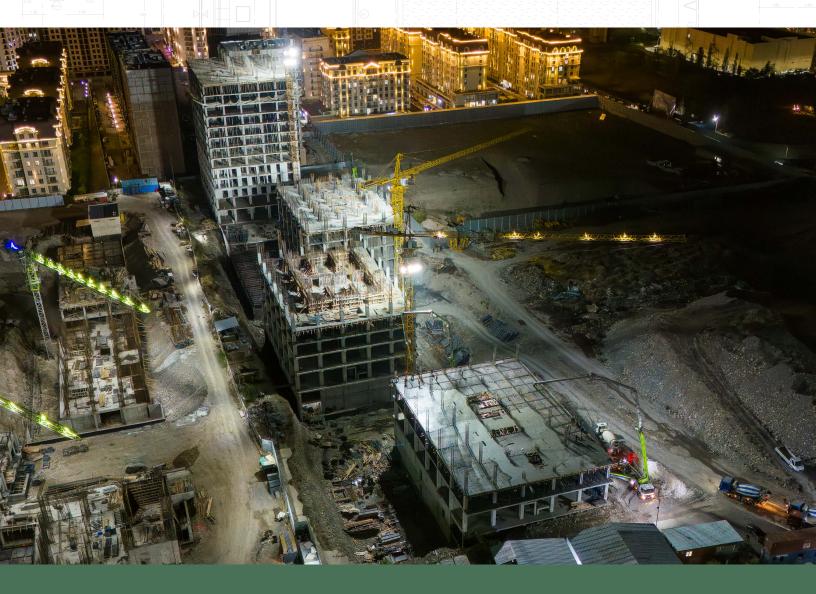

RESIDENTIAL TEMPORARY POWER

A Portable, Easily Maintained **Power Distribution System**

We have taken an innovative approach in an area that has failed to evolve over the years.

We designed our products to provide you with quick and convenient access to electrical components for service and maintenance, while also maintaining a high level of portability and usability.



1-year no-hassle warranty



NEMA 3R weatherproof enclosure



Scalable in sizes and capacity



Customizable and versatile



Multiple input styles



Portable



Lockable Enclosure



Easily Maintained




Universal compatibility



Approved to UL & CSA standards


















RESIDENTIAL TEMPORARY LIGHTING

Reliable Lighting for Every Residential Build

Safe, quick to install, and built to last – Jobsite 360 Residential Lighting is a reusable asset designed for mid to high-rise residential developments. Delivering brighter, more durable performance than traditional bulb-based systems, it ensures professional-grade illumination project after project.

Our lighting solutions include temp-on-perm lighting, string-lighting, portable floodlights and a wide array of site lighting.



Temp-on-perm lighting option



Energy-efficient LED technology



Durable for indoor or outdoor use



Safe and quick installation



Approved to UL & CSA standards



Long LED lifespan



Reusable asset



Rugged, impact-resistant housing



Multiple mounting options



Brighter than other bulb-based alternatives



Temp-On-Perm Light















POWER CONTAINER OVERVIEW

Lind Equipment's **Power Container** is the starting point for jobsite power, connecting directly to the grid. Developed specifically for construction sites, its modular design allows for faster delivery and flexible setup without sacrificing performance or functionality. The **Power Container** is available in 10ft or 20ft and can easily be set up to supply power to our **Transformer Carts** and **Power Dollies**.

Features

- Accepts parallel service feeds.
- Pre-installed main disconnect switch.
- Pre-installed lockable meter cabinet.
- Universal bus bar splitter trough.
- Easy-to-swap bus bar lugs.
- Multiple sizes of fusible disconnects available.
- Optional: Transformer and low voltage panel.

Benefits

- Lockable roll-up container door.
- Forklift /telehandler pockets.
- Hoisting eyelets.
- Interior LED lighting.
- Customizable configurations.
- Awning & rubber gasket for wire feeds.
- Optional: Co-branded with company colours/ logos.





OVERVIEW	
Description	Power Distribution Container
Container Sizes	10ft or 20ft
Input Amperage	600A - 2500A
Input Voltage	480V or 600V
Output Amperage	15A - 800A per disconnect
Output Voltage	480V or 600V *120V available at request
Approvals	Approved to UL & CSA standards

Contact Us To Build Yours Today

Email: info@jobsite360.net **Go to:** jobsite360.net





TRANSFORMER CART OVERVIEW

Lind Equipment's **Transformer Cart** is the reliable link between your power source and distribution, delivering safe and portable jobsite power. Designed for flexibility and durability, it fits through standard doors and moves easily across tough terrain. The **Transformer Cart** is easily deployed and can be used to supply power to our **50A Power Distribution Box**, **50A Hitching Post**, **30A Power Distribution Box**, along with powering general tools and equipment.

Features

- Accommodates 30 75KVA transformers.
- Forklift/telehandler pockets.
- Hoisting eyelets.
- Heavy-duty swivel casters.
- Covered storage shelf.
- NEMA 3R weatherproof enclosure.
- Dedicated Quad USB receptacle for charging mobile devices.
- Built-in Beacon360 Blaze area light.
- Safety handles.
- Fits through a standard doorway.

Installation Guidelines

 We estimate that this Lind power unit has a 100ft x 100ft (10,000ft²) area of coverage, assuming the use of 50ft extension cords to power tools and equipment.





OVERVIEW	
Description	Power Distribution Transformer Cart
Input Amperage	30A - 400A
Input Voltage	480V or 600V
Transformers	30KVA, 45KVA, 75KVA
Output Amperage	100A - 225A
Output Voltage	120V/208V
Weatherproof Receptacles	2-6 x 50A 125/250V TL (Cali Std) 6 x 20A 125V GFCI Duplex (5-20R) 2 x 30A 250V TL (L6-30R) 1 x 4.8A Quad USB
Construction	Heavy-Gauge Powder Coated Steel
Approvals	Approved to UL & CSA standards
Dimensions	55.5" L x 30.75" W x 67.5" H

Check out the full datasheet and our standard configurations Go To: jobsite360.net/products





POWER DOLLY OVERVIEW

Lind Equipment's **Power Dolly** is a compact and portable solution for jobsite power distribution. **Designed with mobility in mind**, it offers quick access to electrical components while maintaining a strong focus on safety. The **Power Dolly** is easily deployed and can be used to supply power to our **50A Power Distribution Box**, **50A Hitching Post**, **30A Power Distribution Box**, along with powering general tools and equipment.

Features

- Configuration options from 100A 400A.
- Hoisting eyelets.
- Foam filled tires.
- Storage shelf.
- Cable hooks.
- NEMA 3R weatherproof enclosure.
- Dedicated Quad USB receptacle for charging mobile devices.
- Built-in Beacon360 Blaze area light.
- Forklift/telehandler pockets.
- Fits through a standard doorway.

Installation Guidelines

 We estimate that this Lind power unit has a 100ft x 100ft (10,000ft²) area of coverage, assuming the use of 50ft extension cords to power tools and equipment.





OVERVIEW	
Description	Power Distribution Dolly
Input Amparage	100A - 400A
Input Voltage	120/240V or 120/208V (480V & 600V available at request)
Weatherproof Receptacles	2-8 x 50A 125/250V TL (Cali Std) 6 x 20A 125V GFCI Duplex (5-20R) 2 x 30A 250V TL (L6-30R) 1 x 4.8A Quad USB
Construction	Heavy-Gauge Powder Coated Steel
Approvals	Approved to UL & CSA standards
Dimensons	22" L x 29" W x 51.25" H

Check out the full datasheet and our standard configurations Go To: jobsite360.net/products





50A POWER DISTRIBUTION BOX DATASHEET

Lind Equipment's **50A Power Distribution Box** is a rugged and portable unit built for efficient jobsite power management. It's unique design provides easy access to electrical components while prioritizing safety and durability. Compact and versatile, the Power Distribution Box is easy to transport, quick to deploy, and simple to maintain. Can be used to supply power to our **30A Power Distribution Box**, along with powering general tools and equipment.

Features

- Integrated GFCI Receptacles.
- Dedicated Quad USB receptacle for charging mobile devices.
- LED Indicator Light on the 50A Input Receptacle.
- Receptacles angled at 45° and protected with weatherproof covers.
- NEMA 3R weatherproof enclosure.
- Internal components are located under a false top for easy access.
- Electrical components are easy to source and readily available.

Installation Guidelines

 We estimate that this Lind power unit has a 100ft x 100ft (10,000ft²) area of coverage, assuming the use of 50ft extension cords to power tools and equipment.







OVERVIEW	
Part Number	92000
Description	50A Power Distribution Box
Input	50A 125/250V TL (Cali Std)
Output	50A 125/250V TL (Cali Std)
Weatherproof Receptacles	6 x 20A 125V GFCI Duplex (5-20R) 1 x 30A 250V TL (L6-30R) 1 x 4.8A Quad USB
Weight	38lbs
Dimensons	23.5" W X 16.5" L X 15.5" H
Construction	Heavy-Gauge Powder Coated Steel
Approvals	Approved to UL & CSA standards
Add-On Accessories	91006 - 50ft power cord 6/3 + 8/1 STOW w/ 50A plug and connector
	91007 - 100ft power cord 6/3 + 8/1 STOW w/ 50A plug and connector



HITCHING POST DATASHEET

Lind Equipment's **Hitching Post** is a portable charging station for battery powered equipment around the jobsite. When in transit or not in use, it can be folded and stowed to save on shipping costs and space. This product features innovations that make it compact, mobile, versatile, and most importantly safe.

Features

- Integrated GFCI Receptacles.
- Foam filled tires.
- Built-in Beacon360 Blaze area light.
- Easily maintained.
- Fits through a standard doorway.
- Plug & play compatibility with other Lind products.
- Outdoor rated.
- Electrical components are easy to source and readily available.





OVERVIEW	
Part Number	LE-HP120-50CS
Description	50A Hitching Post (Equipment Charging Station)
Input	50A 125/250V TL (Cali Std)
Weatherproof Receptacles	10x 20A 125V GFCI Duplex (5-20R) 1x 15A 125V GFCI Singlet (5-15R)
Weight	250lbs
Dimensions	Deployed: 131" L x 30" W x 53" H Stowed: 75" L x 30" W x 53" H
Construction	Heavy-Gauge Powder Coated Steel
Construction Approvals	Heavy-Gauge Powder Coated Steel Approved to UL & CSA standards
	, -



30A POWER DISTRIBUTION BOX DATASHEET

Lind Equipment's **30A Power Distribution Box** is a rugged and portable unit built to supply power to a small task area. It's unique design provides easy access to electrical components while prioritizing safety and durability. Compact and versatile, the Power Distribution Box is easy to transport, quick to deploy, and simple to maintain. Can be used to supply power to general tools and equipment.

Features

- Integrated GFCI Receptacles.
- Dedicated Quad USB receptacle for charging mobile devices.
- LED Indicator Light on the 30A Input Receptacle.
- Receptacles angled at 45° and protected with weatherproof covers.
- Internal components are located under a false top for easy access.
- Electrical components are easy to source and readily available.
- NEMA 3R weatherproof enclosure.





OVERVIEW	
Part Number	92030
Description	30A Power Distribution Box
Input	30A 125/250V TL (L14-30P)
Weatherproof Receptacles	4x 20A 125V GFCI Duplex (5-20R) 1x 4.8A Quad USB
Weight	27lbs
Dimensions	16.5" W x 14.25" L x 15.5" H
Construction	Heavy-Gauge Powder Coated Steel
Approvals	Approved to UL & CSA standards
Add-On Accessories	LE10/4-10 - 10ft power cord , 10/4 SJTW w/ 30A plug and connector
	LE10/4-25 - 25ft power cord , 10/4 SJTW w/ 30A plug and connector
	LE10/4-50 - 50ft power cord , 10/4 SJTW w/ 30A plug and connector
	LE10/4-100 - 100ft power cord , 10/4 SJTW w/ 30A plug and connector



TEMP-ON-PERM LIGHT DATASHEET

Our Temp-on-Perm light has been engineered to make residential construction safer, faster, and more efficient. With a design focused on safe, quick installation, it provides a reliable reusable asset that can be redeployed across future projects. Offering brighter, longer-lasting performance than traditional bulb-based alternatives, it delivers the durability and professional-grade illumination that modern developments demand.

Features

- Safe & quick installation.
- Reusable asset for future projects.
- Brighter and more durable than bulb-based alternatives.
- IP65 weather and wet location rated.
- 90V-277V input range.
- Approved to UL & CSA standards.

- Temporary lighting on permanent power (Temp-On-Perm).
- Residential construction and renovation lighting.
- Safe, temporary lighting for hallways, corridors, stairwells and general areas.







OVERVIEW	
Part Number	LE-RTP16LED
Description	16W LED Temp-On-Perm Light
Lumens	2,000 lumens
Cord	1ft 14/3 SJTW with weatherproof strain relief and lever wire connector
Amp Draw (@120V)	0.14A
Weight	0.75lbs
Construction	High impact plastic with polycarbonate lens



SJ14 STRING-LIGHT DATASHEET

Features

- Energy-efficient 14W LED bulbs (100W incandescent equivalent) for bright, even lighting.
- Durable plastic guards protect bulbs from damage during active work.
- High-visibility yellow cable for improved on-site safety.
- Linkable design for extended runs across larger areas.
- Hanging points on each socket for quick, flexible installation.
- 120V input.
- Approved to UL & CSA standards.

- Residential construction and renovation lighting.
- Safe, temporary lighting for hallways, corridors, stairwells and general areas.



Metal guard options available



OVERVIEW	
Part Number	50ft: TLS-50SJ14LED100ft: TLS-100SJ14LED
Description	 50ft 14/3 String-light with 5x plastic guards, 5x LED bulbs and plug & connector
	 100ft 14/3 String-light with 10x plastic guards, 10x LED bulbs and plug & connector
Bulb	14W A19 LED bulb with standard E-26 base (100W incandescent equivalent)
Lumens	• 50ft: 7,500 lumens (1,500 lumens per bulb)
	• 100ft: 15,000 lumens (1,500 lumens per bulb)
Weight	50ft: 9lbs100ft: 16lbs
Metal Guard Options	50ft: TLS-50MGSJ14LED100ft: TLS-100MGSJ14LED



BEACON970 FLOODLIGHT DATASHEET

Features

- As bright as a 500W quartz halogen.
- Low energy usage.
- No bulb replacement required.
- Instant start-up, at full output, even in cold temperatures.
- Cool to the touch.
- IP65 weather and wet location rated.
- 90V-277V input range.
- Approved to UL & CSA standards.

- Construction.
- Mining.
- Utilities.
- Fabrication workshops.





OVERVIEW	
OVERVIEW	
Part Number	LE970LED
Description	40W LED Floodlight
Lumens	5,945 lumens
Amp Draw (@120V)	0.34A
Weight	8lbs
Cord	15ft 14/3 SJTW with 5-15 Plug
Construction	Cast aluminum housing with polycarbonate lens
Dimensions	7.25"H x 9"W x 5.25"D
Mounting Options	Eyebolt (included), 4-8ft Tripod (-TR), Dual Head Tripod (-TD) Floorstand (-FS), Magnet (-MAG), Scaffold Clamp (-CLAMP)



BEACON965C BATTERY FLOODLIGHT DATASHEET

Features

- Cordless & rechargeable.
- As bright as a 300W quartz halogen.
- Low energy usage.
- No bulb replacement required.
- Instant start-up, at full output, even in cold temperatures.
- Cool to the touch.
- Can operate while charging.
- Weather and wet location rated.
- 120V input (AC charger).
- Approved to UL & CSA standards.

- Construction.
- Mining.
- Utilities.
- Fabrication workshops.





OVERVIEW	
Part Number	LE965CLED
Description	30W Battery Operated LED Floodlight
Lumens	4,000 lumens
Charge Time	5 hours
Run Time	4 hours at 100%8 hours at 50%25 hours at 15%
Weight	8lbs
Construction	Cast aluminum housing with polycarbonate lens
Dimensions	7.25"H x 9"W x 5.25"D
Mounting Options	Eyebolt (included), 4-8ft Tripod (-TR), Dual Head Tripod (-TD) Floorstand (-FS), Magnet (-MAG), Scaffold Clamp (-CLAMP)





BEACON980 FLOODLIGHT DATASHEET

Features

- Reinforced mounting yoke is adaptable to install on virtually any base.
- No expensive and breakable ballast.
- Available as retrofit kit to upgrade existing light towers and carts.
- State-of-the-art DirectDrive technology eliminates the need for external driver.
- Cart model features built-in generator pad, winch-assisted 12ft mast and foam filled rubber tires for completely safe and hassle-free operation.
- IP65 weather and wet location rated.
- 90V 277V input range.
- Approved to UL & CSA standards.

- Crane/pit lighting
- Concrete pours
- General site lighting
 - Excavations
- Light carts









OVERVIEW	\
Part Number	LE980LED
Description	200W Large Area Floodlight
Lumens	30,000 lumens
Amp Draw (@120V)	1.67A
Weight (light head)	16lbs
Cord	15ft 16/3 SJTW with 5-15 Plug
Construction	High strength lightweight aluminum housing with polycarbonate lens
Mounting options	Rugged steel adjustable bracket
LE980LED- TRW	Single light head, comes with a heavy-duty tripod with winch (max height: 12ft)
LE980LED- CART-W	Single light head, comes with a 2-wheel cart with winch (max height: 12.5ft)
LE980LED- CART-TD-W	Dual light head, comes with a 2-wheel cart with winch (max height: 12.5ft)





BEACON980 LED LIGHT TOWER DATASHEET

Features

- Unparalleled light output.
- Plugs into a 120V outlet, 2 units can run on a single 15A/120V circuit.
- Can also run on a user supplied 1,000W or 2,000W suitcase generator.
- Electric mode provides quiet operation with no fumes.
- Easily fits in the back of a pickup truck.
- Heavy-gauge powder coated steel construction.
- Forklift/telehandler pockets.
- Fits through a standard doorway.
- Approved to UL & CSA standards.

- Replaces a 4,000W Metal-Halide Light Tower
- Large-area site lighting
- Concrete pours
- Jobsite roadway and walkway lighting





OVERVIEW	
Part Number	LE980LEDV-T4
Description	800W LED Light Tower
Lumens	120,000 lumens
Amp Draw (@120V)	6.67A
Height	16ft (20ft for the EM Versions)
Linkage Rating	2 units on a 15A/120V circuit
Run Time	Approx. 45 hours on a user supplied 2000W suitcase generator paired with included auxiliary fuel tank
Wind Resistance	45mph (72km/h)
Portability	All-terrain caster tires, rigging eyelet and forklift/telehandler pockets
Other Models	Towable - LE980LEDV-TRAILER Extended Mast - LE980LEDVEM-T4 EM Towable - LE980LEDVEM-TRAILER







BUILT TO OUTLAST THE JOB

For over 75 years, Lind Equipment has been designing and manufacturing portable electrical products that stand up to the harshest environments. From construction sites to industrial facilities, our lighting and power solutions are engineered for maximum durability, safety and performance so you can *work confidently*, anywhere.

PROVEN IN THE TOUGHEST WORKPLACES



Canada 5000 Yonge Street, Suite 1402 Toronto, ON M2N 7E9



United States
300 International Drive, Suite 100
Williamsville, NY 14221

Email the below to be connected with your local Jobsite 360 representative.

info@jobsite360.net



Powered By LIND EQUIP